

NLED94*

Normal downlight



DESCRIPTION

- Glare proof Recessed LED downlight with frosted cover

CONSTRUCTION

- Main Material: Die-cast aluminum
- Surface treatment: baking finish
- High quality light guide plate (LGP) inside for glare-free output





SPECIFICATION

- Energy saving, up to 85% energy saving comparing to standard halogen and incandescent lamps
- Long life, up to 25000 hours
- High quality light, high color rendering, less heat, no UV or IR radiation
- Supplied with LED driver

APPLICATIONS

- Entertainment & leisure, retail & office, domestic

PHOTOMETRIC DATA

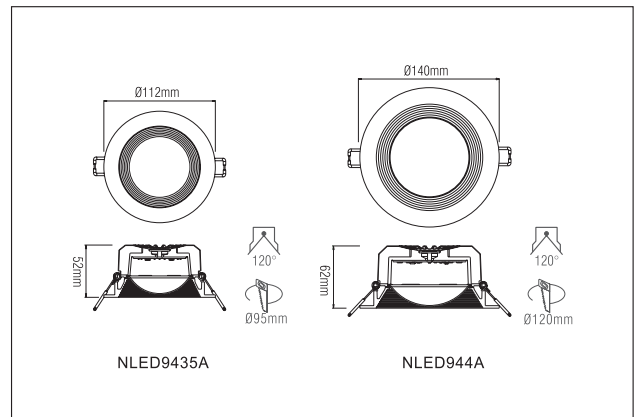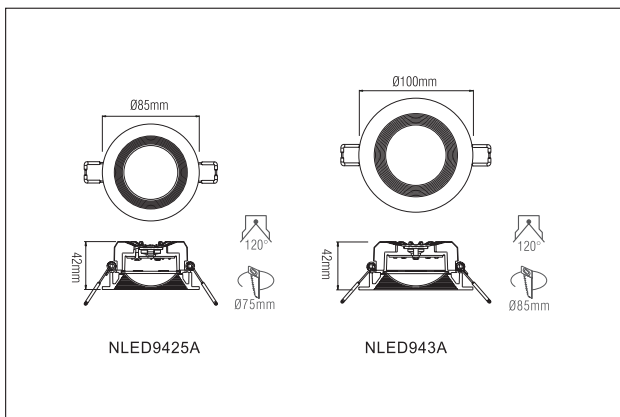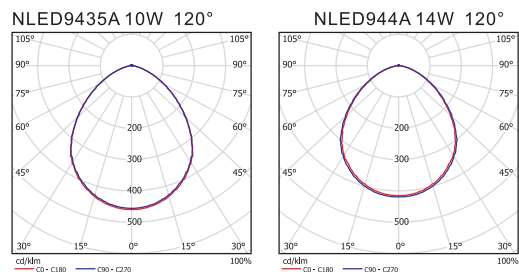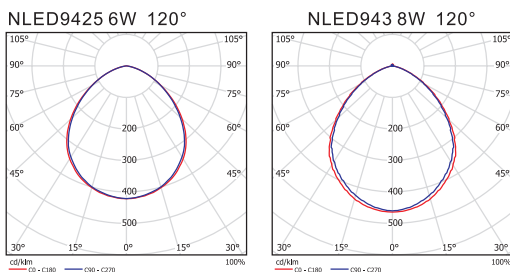

Model	Watt	Lumen	Lumen/Watt	Color temp.	CRI
NLED 9425 6W 3000K	6 W	340 lm	57 lm/W	3000 K	80
NLED 943 8W 3000K	8 W	520 lm	65 lm/W	3000 K	80
NLED 9435 10W 3000K	10 W	580 lm	58 lm/W	3000 K	80
NLED 944 14W 3000K	14 W	860 lm	61 lm/W	3000 K	80