

# NLED95\*

Normal downlight



### DESCRIPTION

- Glare proof Recessed LED downlight with frosted cover

### CONSTRUCTION

- Metal stamping with PMMA cover
- Robust steel base in powder finish

### SPECIFICATION


- Energy saving, up to 85% energy saving comparing to standard halogen and incandescent lamps
- Long life, up to 25000 hours
- High quality light, high color rendering, less heat, no UV or IR radiation
- Supplied with LED driver

### APPLICATIONS


- Entertainment & leisure, retail & office, domestic

### PHOTOMETRIC DATA


NLED9525 3W 120°






NLED953 5W 120°



NLED9535 7W 120°



NLED954 9W 120°

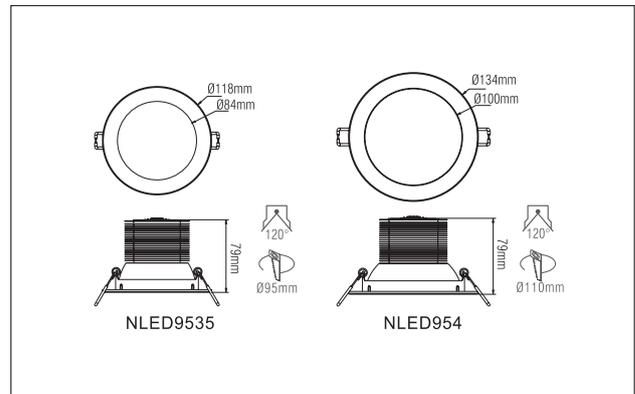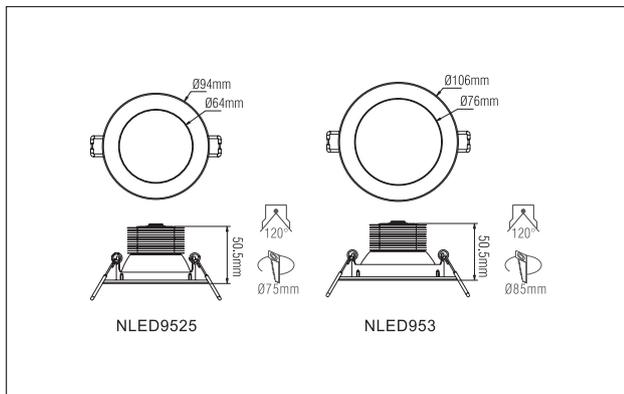

Model	Watt	Lumen	Lumen/Watt	Color temp.	CRI
NLED 9525 3W 3000K	3 W	160 lm	53 lm/W	3000 K	80
NLED 953 5W 3000K	5 W	300 lm	60 lm/W	3000 K	80
NLED 9535 7W 3000K	7 W	440 lm	63 lm/W	3000 K	80
NLED 954 9W 3000K	9 W	600 lm	67 lm/W	3000 K	80