

# NLED98\*

Normal downlight



LED Downlight



### DESCRIPTION


- Glare proof Recessed LED downlight with frosted cover

### CONSTRUCTION

- Plastic bezel with PMMA cover
- High quality light guide plate (LGP) inside for glare-free output

### SPECIFICATION





- Energy saving, up to 85% energy saving comparing to standard halogen and incandescent lamps
- Long life, up to 25000 hours
- High quality light, high color rendering, less heat, no UV or IR radiation
- Supplied with LED driver



### APPLICATIONS

- Entertainment & leisure, retail & office, domestic

### PHOTOMETRIC DATA

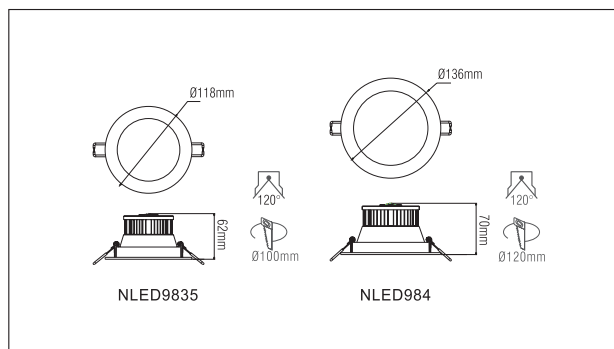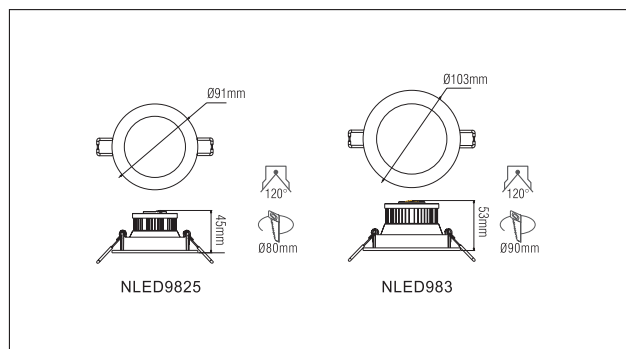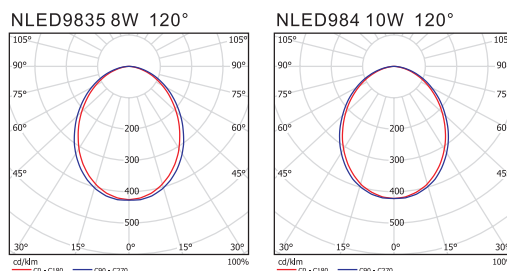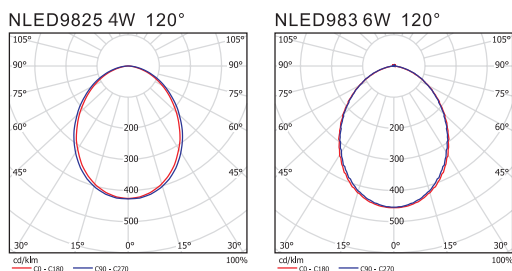

Model	Watt	Lumen	Lumen/Watt	Color temp.	CRI
NLED 9825 4W 3000K	4 W	210 lm	53 lm/W	3000 K	80
NLED 983 6W 3000K	6 W	300 lm	50 lm/W	3000 K	80
NLED 9835 8W 3000K	8 W	420 lm	53 lm/W	3000 K	80
NLED 984 10W 3000K	10 W	550 lm	55 lm/W	3000 K	80