

# NLED99\*

Normal downlight



### DESCRIPTION

- Glare proof Recessed LED downlight with frosted cover

### CONSTRUCTION

- Aluminum bezel with PMMA cover
- Robust steel base in baking finish
- High quality light guide plate (LGP) inside for glare-free output

### SPECIFICATION



- Energy saving, up to 85% energy saving comparing to standard halogen and incandescent lamps
- Long life, up to 25000 hours
- High quality light, high color rendering, less heat, no UV or IR radiation
- Supplied with LED driver



### APPLICATIONS

- Entertainment & leisure, retail & office, domestic

### PHOTOMETRIC DATA

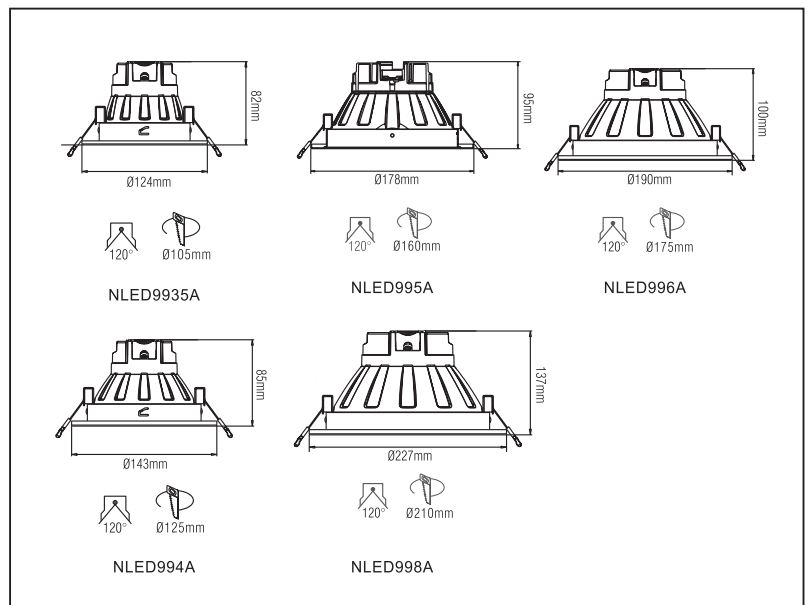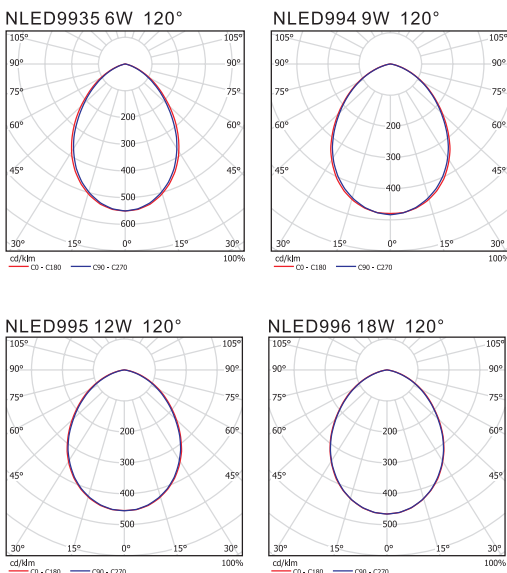

Model	Watt	Lumen	Lumen/Watt	Color temp.	CRI
NLED 9935A 6W 3000K	6 W	390 lm	65 lm/W	3000 K	80
NLED 994A 9W 3000K	9 W	630 lm	70 lm/W	3000 K	80
NLED 995A 12W 3000K	12 W	800 lm	67 lm/W	3000 K	80
NLED 996A 15W 3000K	15 W	1050 lm	70 lm/W	3000 K	80
NLED 998A 20W 3000K	20 W	1400 lm	70 lm/W	3000 K	80