

LED T8B



SPECIFICATION


- Replacement for fluorescent T8, up to 85% energy saving
- Aluminium housing for heat sinking of LEDs
- Impact resistant clear/frosted polycarbonate diffuser
- Long life, up to 30.000/50.000 hours
- High color rendering, no UV or IR radiation
- Single terminal wiring
- Rotateable heads

APPLICATION

- Ideal for T8 fluorescent fittings


OPTIONS

- **LED T8B15 - 5 years warranty, 50.000 hours**

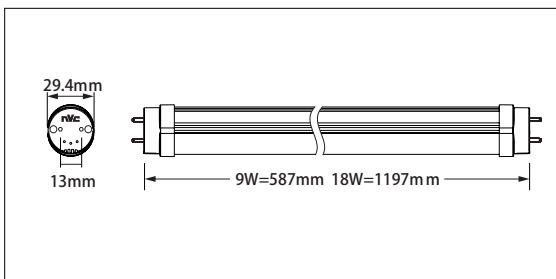


Photometric Data

LED T8B06 9W



LED T8B12 18W



Model	Watt	Lumen	Lumen/Watt	Color temp.	CRI
LED T8B06 9W 4000K	9 W	700 lm	78 lm/W	4000 K	75
LED T8B06 9W 6500K	9 W	800 lm	89 lm/W	6500 K	75
LED T8B12 18W 4000K	18 W	1500 lm	61 lm/W	4000 K	75
LED T8B12 18W 6500K	18 W	1600 lm	67 lm/W	6500 K	75
LED T8B15-5Y 27W 4000K	27 W	2646 lm	98 lm/W	4000 K	82+
LED T8B15-5Y 27W 6500K	27 W	2646 lm	98 lm/W	4000 K	82+