



# MR16I/GU10I

PC coated aluminium housing LED lamps, ideal replacement for traditional spotlight



GX5.3 base (Class III)

Gu10 base (Class II)



### APPLICATIONS

- Suitable for use in fittings with either a GX5.3 or GU10 lamp holder

### TECHNICAL DETAILS



- High Power LED
- Rated life: 30,000 hours

### CONSTRUCTION

- Polycarbonate coated aluminium housing
- Built-in constant current LED driver included
- Dimmable version complete with dimmable driver

### OPTIONS

- **Beam angle:** choice of 24° or 38°
- **Dimming:** Fixed output as standard, but mains dimmable versions are available for use with suitable phase-cutting dimmers. If required, add suffix MD when ordering.

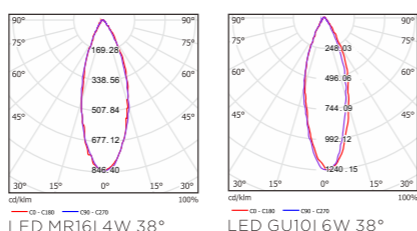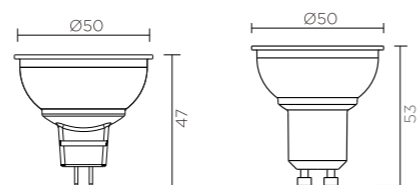

Model	Colour temp.	Lumens	Input	Dimmable	CRI	PF	Beam angle
LED MR16I 3W	2700K/3000K/4000K/6000K	220lm	AC/DC12V	NO	>80	>0.75	24°/38°
LED MR16I 4W	2700K/3000K/4000K/6000K	360lm	AC/DC12V	NO	>80	>0.75	24°/38°
LED MR16I 5W	2700K/3000K/4000K/6000K	440lm	AC/DC12V	NO	>80	>0.75	24°/38°
LED GU10I 3W	2700K/3000K/4000K/6000K	300lm	110-240V	NO	>80	>0.75	24°/38°
LED GU10I 4W	2700K/3000K/4000K/6000K	360lm	110-240V	NO	>80	>0.75	24°/38°
LED GU10I 6W	2700K/3000K/4000K/6000K	580lm	110-240V	NO	>80	>0.75	24°/38°
LED GU10I DIM 6W	2700K/3000K/4000K/6000K	550lm	220-240V	YES	>80	>0.75	24°/38°

# LED CLE/CLLE

Convenient replacement for CFL and incandescent lamps with E14 base



CLLE E14

CLE E14



### APPLICATIONS

- To replace conventional candle lamps in fittings with E14 lampholders

### TECHNICAL DETAILS

- SMD LED
- Rated life: 25,000 hours

### CONSTRUCTION

- Plastic coated aluminium housing
- Built-in constant current LED driver included

### OPTIONS

- **Dimming:** Fixed output as standard, but mains dimmable versions are available for use with suitable phase-cutting dimmers. If required, add suffix MD when ordering.
- 110-240V: Standard version
- 220-240V: Dimmable version

Model	Colour temp.	Lumens	Input	CRI	PF
LED CLE 3W	2700K/3000K/4000K/6500K	240lm	110-240V	>80	>0.7
LED CLE 4W	2700K/3000K/4000K/6500K	310lm	110-240V	>80	>0.7
LED CLE 5W	2700K/3000K/4000K/6500K	370lm	110-240V	>80	>0.7
LED CLE DIM 5W	2700K/3000K/4000K/6500K	370lm	220-240V	>80	>0.7
LED CLL E 3W	2700K/3000K/4000K/6500K	240lm	110-240V	>80	>0.7
LED CLL E 4W	2700K/3000K/4000K/6500K	310lm	110-240V	>80	>0.7
LED CLL E 5W	2700K/3000K/4000K/6500K	370lm	110-240V	>80	>0.7
LED CLL E DIM 5W	2700K/3000K/4000K/6500K	370lm	220-240V	>80	>0.7

