


NLEDM 910*

Surface mounted downlight



White

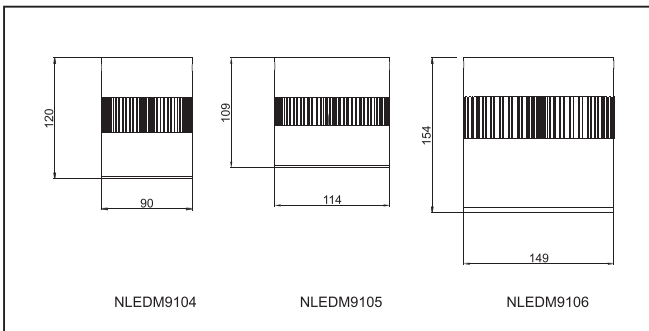

DESCRIPTION

- Surface mounted LED downlight

CONSTRUCTION

- Die casting aluminum housing + frosted glass diffuser

SPECIFICATION

- Energy saving, up to 85% energy saving comparing to standard halogen and incandescent lamps
- Long life, up to 30000 hours
- LED COB
- Isolated driver, EMC/EMI compliant

APPLICATIONS

- Hotels, exhibition hall, house, home etc.

Model	Watt	Lumen	Lumen/Watt	Color temp.	Dimmable	CRI
NLEDM 9104 10W 3000K	10 W	800 lm	80 lm/W	3000 K	no	80
NLEDM 9104 10W 4000K	10 W	800 lm	80 lm/W	4000 K	no	80
NLEDM 9105 20W 3000K	20 W	1600 lm	80 lm/W	3000 K	no	80
NLEDM 9105 20W 4000K	20 W	1600 lm	80 lm/W	4000 K	no	80
NLEDM 9106 30W 3000K	30 W	2400 lm	80 lm/W	3000 K	no	80
NLEDM 9106 30W 4000K	30 W	2400 lm	80 lm/W	4000 K	no	80