



5 YEARS WARRANTY



Wide 90°



Double Asymmetric



Flat 120°

LED PAM Trunk



Model	Power	Lumens Lm	Color temp.	CRI	Beam angle	Input	Dimensions (mm)		
2R LED PAM Trunk 60W, 150lm/W, 7 wire	60 W	9000	4000 K	Ra>80	90°, 120°, DA	230 V	1424 x 48 x 42.5		
2R LED PAM Trunk 80W, 150lm/W, 7 wire	80 W	12 000	4000 K	Ra>80	90°, 120°, DA	230 V	1424 x 48 x 42.5		




Beam angle
90°
120°
Double Asymmetric

7 Core system
Standard and dimming function or standard and emergency function

Dimming Function
DALI
1-10V - option

We can run
maximum 80 meters of continued luminaire under 230V AC with 60W 1424mm lumiaires each.
maximum 65 meters of continued luminaire under 230V AC with 80W 1424mm lumiaires each.

1 pcs INCLUDED
- body
- caps
- 2 pcs pendel
- conectors

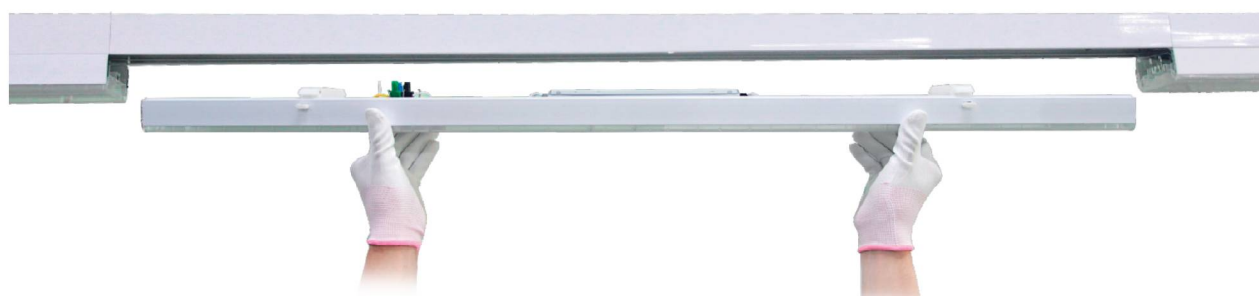

Model		
2R LED PAM Trunk 7 wires L node		
2R LED PAM Trunk 7 wires T node		

