NLBLED405

IP65 WATERPROOF BATTEN

NLBLED405

Internally mounted sealed clips IP65 waterproof batten

105° 220-240V IP65 30000h

APPLICATIONS

- General
- Factories
- Car parks
- Warehouses

CONSTRUCTION

- PC (polycarbonate) housing
- Opal PC (polycarbonate) diffuser
- Internally mounted sealed clips
- Sliding clips mounting
- LED driver included

TECHNICAL DETAILS

- SMD LEDs
- 40W / 3,600 lm
- Rated life: 30,000 hours

NLBLED405 21W



NLBLED405 40W



NLBLED405 55W



Model	Watts	Colour temp.	Lumens	CRI
NLBLED405 21W	21W	3000K/4000K/6500K	1,800 lm	>70
NLBLED405 40W	40W	3000K/4000K/6500K	3,600 lm	>70
NLBLED405 55W	55W	3000K/4000K/6500K	4,800 lm	>70

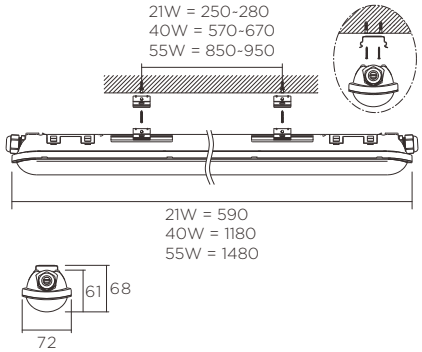

Fully sealed unit
NLBLED405 is fully sealed. No need to remove the cover, no external clips to break or gather dirt.

All-polycarbonate construction
Base and cover are both made of polycarbonate for maximum strength. This fitting is almost unbreakable!

Easy mounting
NLBLED405 is supplied with stainless steel mounting clips. Screw them to the ceiling then snap-fit CROSBY into place.

Easy wiring
NLBLED405 is through wired, with an IP65 cable entry at each end and a terminal block that is easy to access from the rear.

Specifications in this leaflet are subject to change without notice. Please contact NVC Lighting Technology Corporation for detailed information.

www.nvc-lighting.com
NVC Wechat

NVC LIGHTING TECHNOLOGY CORPORATION
Add: NVC Industrial Park, Ruhu, Huizhou, Guangdong, PRC
Tel: +86-752-2786675
Fax: +86 752-2786689
E-mail: sales@nvc-lighting.com

Facebook: nvclightingcorp
Twitter: NVC_Lighting
Linkedin: nvclightingcorp
Instagram: nvclightingglobal