


Product name of OCLYTE® poles:

The product name of the pole contains its technical information.

Example: **OCLYTE® 12 Z FL 424**

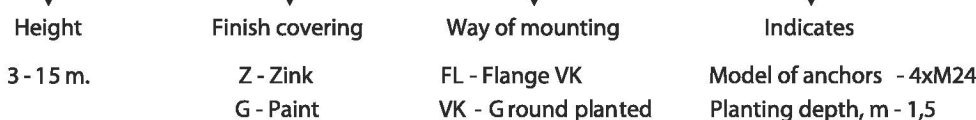

Technical features of OCLYTE® - Poles with Flange

The pole with flange should be mounted with anchors.

You can see the main sizes in the chart. The anchors are delivered together with pole.



OCLYTE® pole 12 z FL 424

Model	Height / m	Number of pcs. / n	Thickness / mm	Weight / kg	Size upper / lower part / mm	Concrete base for fixing / mm	Flange size	Anchors	Protection finish
2R Oclyte 4 Z FL 412	4	1	2	23	120/60	600x600x700	250x250x8	4xM12	hot zinc
2R Oclyte 5 Z FL 412	5	2	3	33	130/60	600x600x700	250x250x8	4xM12	hot zinc
2R Oclyte 6 Z FL 412	6	2	3	45	140/60	600x600x700	250x250x12	4xM12	hot zinc
2R Oclyte 7 Z FL 416	7	2	3	56	160/60	600x600x800	250x250x12	4xM16	hot zinc
2R Oclyte 8 Z FL 416	8	2	3	67	170/60	600x600x800	250x250x12	4xM16	hot zinc
2R Oclyte 9 Z FL 422	9	2	3	88	180/60	600x600x1000	250x250x16	4xM22	hot zinc
2R Oclyte 10 Z FL 422	10	3	3	100	190/60	600x600x1000	250x250x16	4xM22	hot zinc
2R Oclyte 11 Z FL 424	11	3	3	112	200/60	600x600x1000	250x250x16	4xM24	hot zinc
2R Oclyte 12 Z FL 424	12	3	3	126	210/60	600x600x1000	250x250x16	4xM24	hot zinc
2R Oclyte 13 Z FL 424	13	4	3	148	220/60	600x600x1000	250x250x16	4xM24	hot zinc
2R Oclyte 14 Z FL 424	14	4	3	159	230/60	600x600x1000	250x250x16	4xM24	hot zinc
2R Oclyte 15 Z FL 424	15	4	3	175	240/60	600x600x1000	250x250x16	4xM24	hot zinc

Technical features of OCLYTE® - Poles ground planted

The poles should be planted in the depths pointed in the chart.

You can see the main sizes in the chart.



OCLYTE® pole 12 z VK 1,5

Model	Height / m	Number of pcs. / n	Thickness / mm	Weight / kg	Size upper / lower part / mm	Concrete base for fixing / mm	planting depth / m	protection finish
2R Oclyte 4 Z VK 1	4	2	3	29	120/60	600x600x1050	1	hot zinc
2R Oclyte 5 Z VK 1	5	2	3	37	130/60	600x600x1050	1	hot zinc
2R Oclyte 6 Z VK 1	6	2	3	47	140/60	600x600x1050	1	hot zinc
2R Oclyte 7 Z VK 1	7	2	3	58	160/60	600x600x1050	1	hot zinc
2R Oclyte 8 Z VK 1	8	3	3	72	170/60	600x600x1050	1	hot zinc
2R Oclyte 9 Z VK 1	9	3	3	85	180/60	700x700x1050	1	hot zinc
2R Oclyte 10 Z VK 1	10	3	3	96	190/60	700x700x1050	1	hot zinc
2R Oclyte 11 Z VK 1	11	3	3	111	210/60	700x700x1050	1	hot zinc
2R Oclyte 12 Z VK 1,5	12	4	3	141	220/60	700x700x1050	1.5	hot zinc
2R Oclyte 13 Z VK 1,5	13	4	3	158	230/60	700x700x1050	1.5	hot zinc
2R Oclyte 14 Z VK 1,5	14	4	3	175	240/60	700x700x1050	1.5	hot zinc
2R Oclyte 15 Z VK 2	15	4	3	158	260/60	700x700x2050	2	hot zinc

Standards: The octagonal poles from model OCLYTE® are manufactured in compliance with Bulgarian and European standards:

- EN 40-1
- EN 40-2
- EN 40-3-1
- EN 40-3-2
- EN 40-3-3
- EN 40-5
- EN ISO 1461
- EN 288-1
- EN 288-2
- EN 288-3
- EN 288-8
- EN 571-1
- EN 970
- EN 12767



How to order OCLYTE®?

OCLYTE® can be ordered on e-mail: office@2r-bg.com

The poles are produced by 2R Bulgaria LTD in its own modern production base in City of Plovdiv, 186 Maritsa-South Blvd.

For questions and orders:

e-mail: plamen.iliev@2r-bg.com, mob.: +359 885 767 555